



PLAN

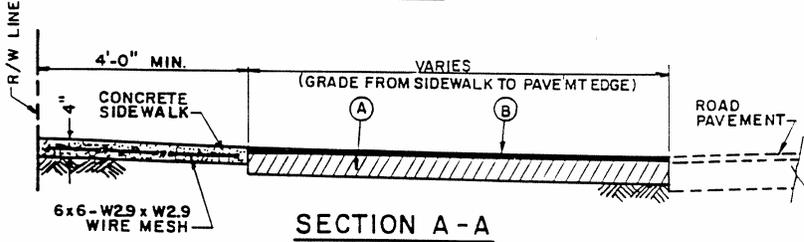


- (A) BASE COURSE 6" THICK
- (B) ASPHALTIC CONCRETE SURFACE COURSE 1" THICK

NOTE:
WHERE SIDEWALK IS NOT REQUIRED, DRIVEWAY PAVEMENT SHALL EXTEND TO R/W LINE.

| ITEM | CROSS REF. | SPEC. REF. |
|--------------------|------------|------------|
| DRIVEWAY SPACING | R 8.0 | |
| CONCRETE SIDEWALK | B 3-1 | R 10.0 |
| ASPHALTIC CONCRETE | B 2-13 | |
| LIMEROCK BASE | B 2-9 | |

| | | | | |
|---|----------|---------|---|--|
| MONROE COUNTY PUBLIC WORKS DEPARTMENT | APPROVED | REVISED | STANDARD ROAD DETAIL ASPHALT DRIVEWAY RESIDENTIAL | R 7.1 SHEET 1 OF 1 |
| | 9/83 | | | |


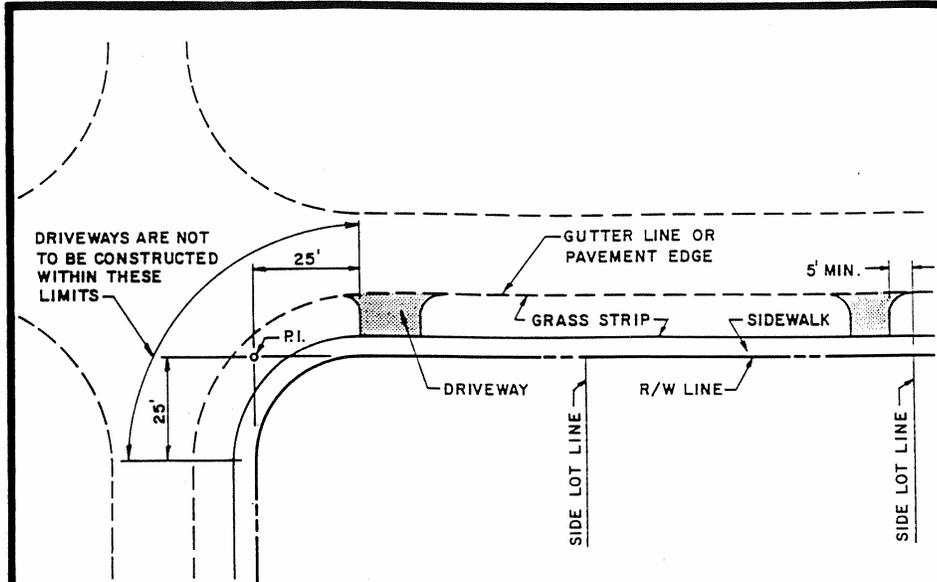


NOTES:

1. THE LIMITS WITHIN WHICH DRIVEWAYS MAY NOT BE CONSTRUCTED ARE DETERMINED BY MEASURING FROM THE P.I. OF R/W LINES A DISTANCE OF 25' ALONG THE R/W LINE CURVE TANGENTS.
2. ALL DRIVEWAYS MUST BE CONSTRUCTED SO THAT NO PART OF THE DRIVEWAY (EXCLUDING THE TRANSITION) BETWEEN THE EDGE OF ROADWAY PAVEMENT AND THE R/W LINE IS CLOSER THAN 5' FROM A SIDE LOT LINE EXTENDED.

| | | | |
|-------------------|-------|------------|------------|
| | | | |
| CONCRETE DRIVEWAY | RB. 2 | | |
| ASPHALT DRIVEWAY | RT. 1 | CROSS REF. | SPEC. REF. |
| ITEM | | | |


| | | | | |
|--|-------------------------------|------------------------|---|--|
| MONROE COUNTY PUBLIC WORKS DEPARTMENT | APPROVED <hr/> <i>9/83</i> | REVISED <hr/> <hr/> | STANDARD ROAD DETAIL RESIDENTIAL DRIVEWAY SPACING | R 8.1 SHEET <u>1</u> OF <u>1</u> |
|--|-------------------------------|------------------------|---|--|

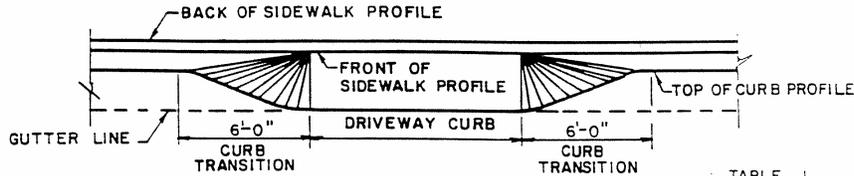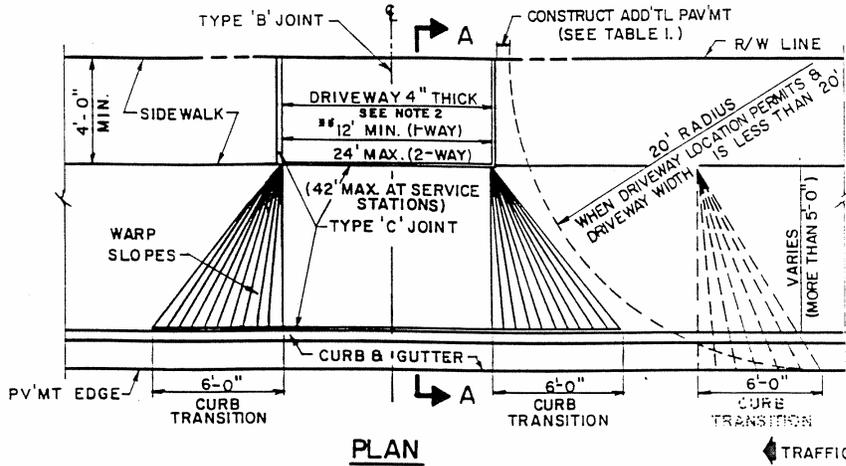

10' MIN. MAY BE USED FOR SINGLE FAMILY RESIDENTIAL AREAS

TABLE 1.

| DRIVEWAY WIDTH | ADD'L 6" CONC. SWK (APPROACH SIDE ONLY) |
|----------------|---|
| UP TO 15' | ADDED WIDTH = 15' |
| 20' | " = 10' |
| 25' | " = 5' |
| 30' and over | NO ADDED WIDTH |

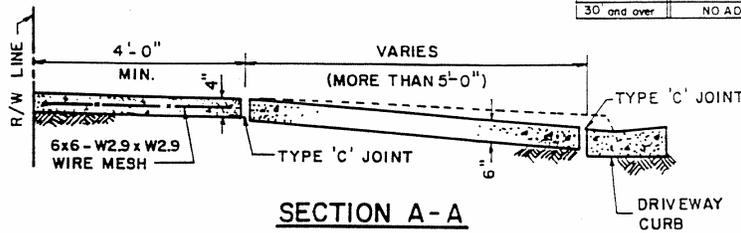

NOTES:

- SPACE JOINTS IN ACCORDANCE WITH STD. DETAIL R-10.0
- AN ALTERNATE 6" CONCRETE SIDEWALK WITH NO MESH MAY BE USED IN LIEU OF THE 4" CONCRETE SIDEWALK. (SEE R-10.0)

| ITEM | CROSS REF. | SPEC. REF. |
|-------------------|------------|------------|
| DRIVEWAY CURB | R10.0 | |
| CURB & GUTTER | R10.0 | |
| CONCRETE SIDEWALK | R10.0 | B3-1 |


MONROE COUNTY
PUBLIC WORKS DEPARTMENT

APPROVED
9/83


REVISED

STANDARD ROAD DETAIL
CONCRETE DRIVEWAY

R
8.2
SHEET 1 OF 2

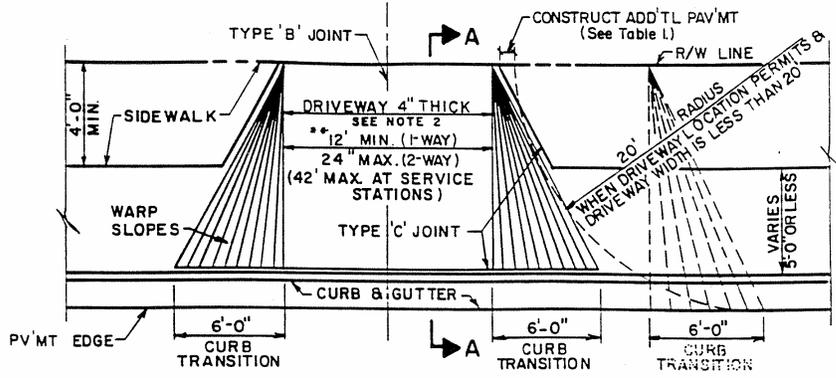

PLAN

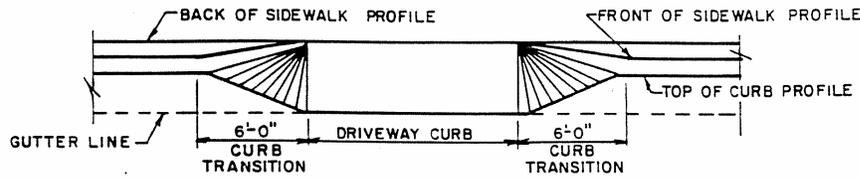


PROFILE

** 10' MIN. MAY BE USED FOR SINGLE FAMILY RESIDENTIAL AREAS

TABLE I.

| DRIVEWAY WIDTH | ADD'TL 6" CONC. SWK. (APPROACH SIDE ONLY) |
|----------------|---|
| UP TO 15' | ADDED WIDTH = 15' |
| 20' | " " = 10' |
| 25' | " " = 5' |
| 30' and over | NO ADDED WIDTH |

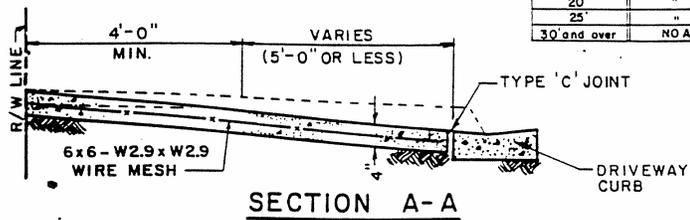

SECTION A-A

NOTES:

1. SPACE JOINTS IN ACCORDANCE WITH STD. DETAIL R-10.0
2. AN ALTERNATE 6" CONCRETE SIDEWALK WITH NO MESH MAY BE USED IN LIEU OF THE 4" CONCRETE SIDEWALK. (SEE R-10.0)

| ITEM | CROSS REF. | SPEC. REF. |
|-------------------|------------|------------|
| DRIVEWAY CURB | R 11.0 | |
| CURB & GUTTER | R 11.0 | |
| CONCRETE SIDEWALK | R 10.0 | B 3-1 |

| | | | | |
|---|----------|---------|---|--|
| MONROE COUNTY PUBLIC WORKS DEPARTMENT | APPROVED | REVISED | STANDARD ROAD DETAIL CONCRETE DRIVEWAY | R 8.2 SHEET 2 OF 2 |
| | 9/83 | | | |